


RUPTURE VALVE MCS		
	3/4	1*1/4
	0825/P-VP22-HP	0393/P-....
A	75	99
B	49	70

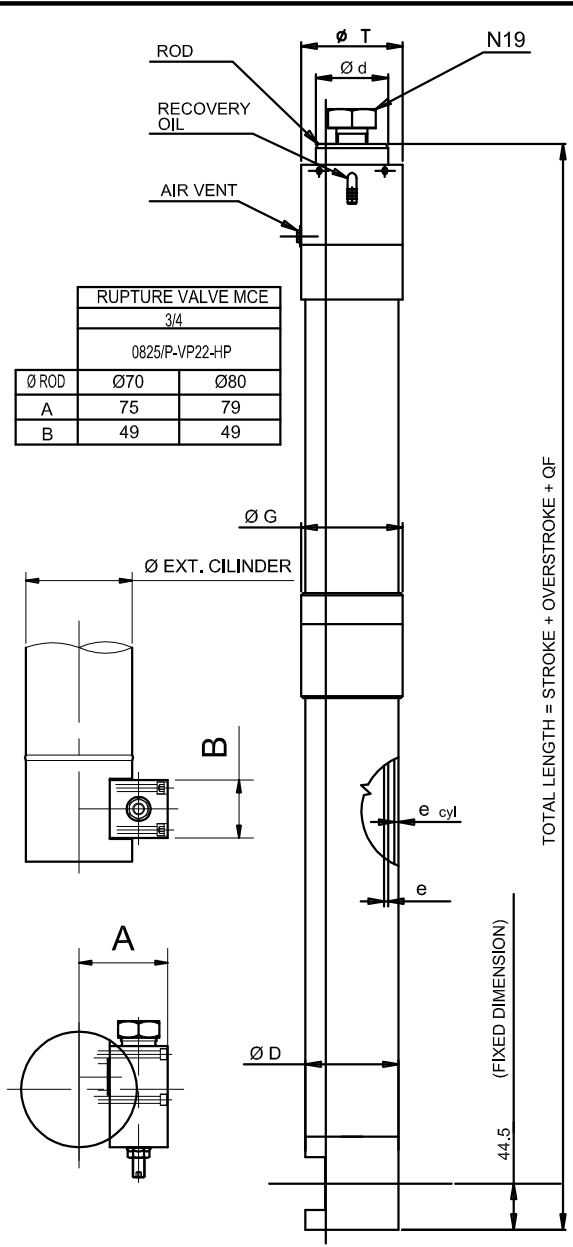

RUPTURE VALVE MCE		
	3/4	
	0825/P-VP22-HP	
Ø ROD	Ø70	Ø80
A	75	79
B	49	49

A	SEE HYDRAULIC POWER UNIT					
N19	T.E. M24x70 Ch. 36 T.E. M30x60 Ch. 46					
QF VERSION: 2	243	243				
QF VERSION: 1	173	173				
ØT	98	110				
ØG	98	113				
e <sub>cyl</sub>	3.7	3.6				
ØD	90	101.6				
OLIO lxm	5.5	7				
WEIGHT Kg	1 M ADDITIONAL	17	20	18	22	29
	3 M OF STROKE	60	70	65	76	95
	KIT GASKETS ROD + CYLINDER	9	8	11	10	8
e	5	7.5	5	7.5	12	
ROD Ød	70		80			

**VERSION 1**  
(Type: MCS)

**VERSION 2**  
(Type: MCE)

**NOTE**

- 1 - MORIS ITALIA REQUIRES ADJUSTMENT OF ROD PROTECTION RING FOR MEASURES HIGHER THAN 3000 mm FOR SINGLE RAM IN ORDER TO AVOID COLLISIONS AND DAMAGES DURING THE TRANSPORT
- 2 - THE RECOMENDED MAXIMUM LENGHT OF THE RAMS MCE-MCS IS 6500 mm BEYONDE THIS MEASURES THE CORRECT FUNCTIONALITY OF RAMS IS NOT GUARANTEED

UT

ROPING 2:1  
FOR LIFT PLATFORM

DATE 06/17  
DWG N. 9131/MCE-MCS